


ADIWATT

Photovoltaics, a matter of expertise

SOLUTION FOR STEEL ROOFING

PRIMA

The PV integration system optimised for quick and robust installation on steel trays.

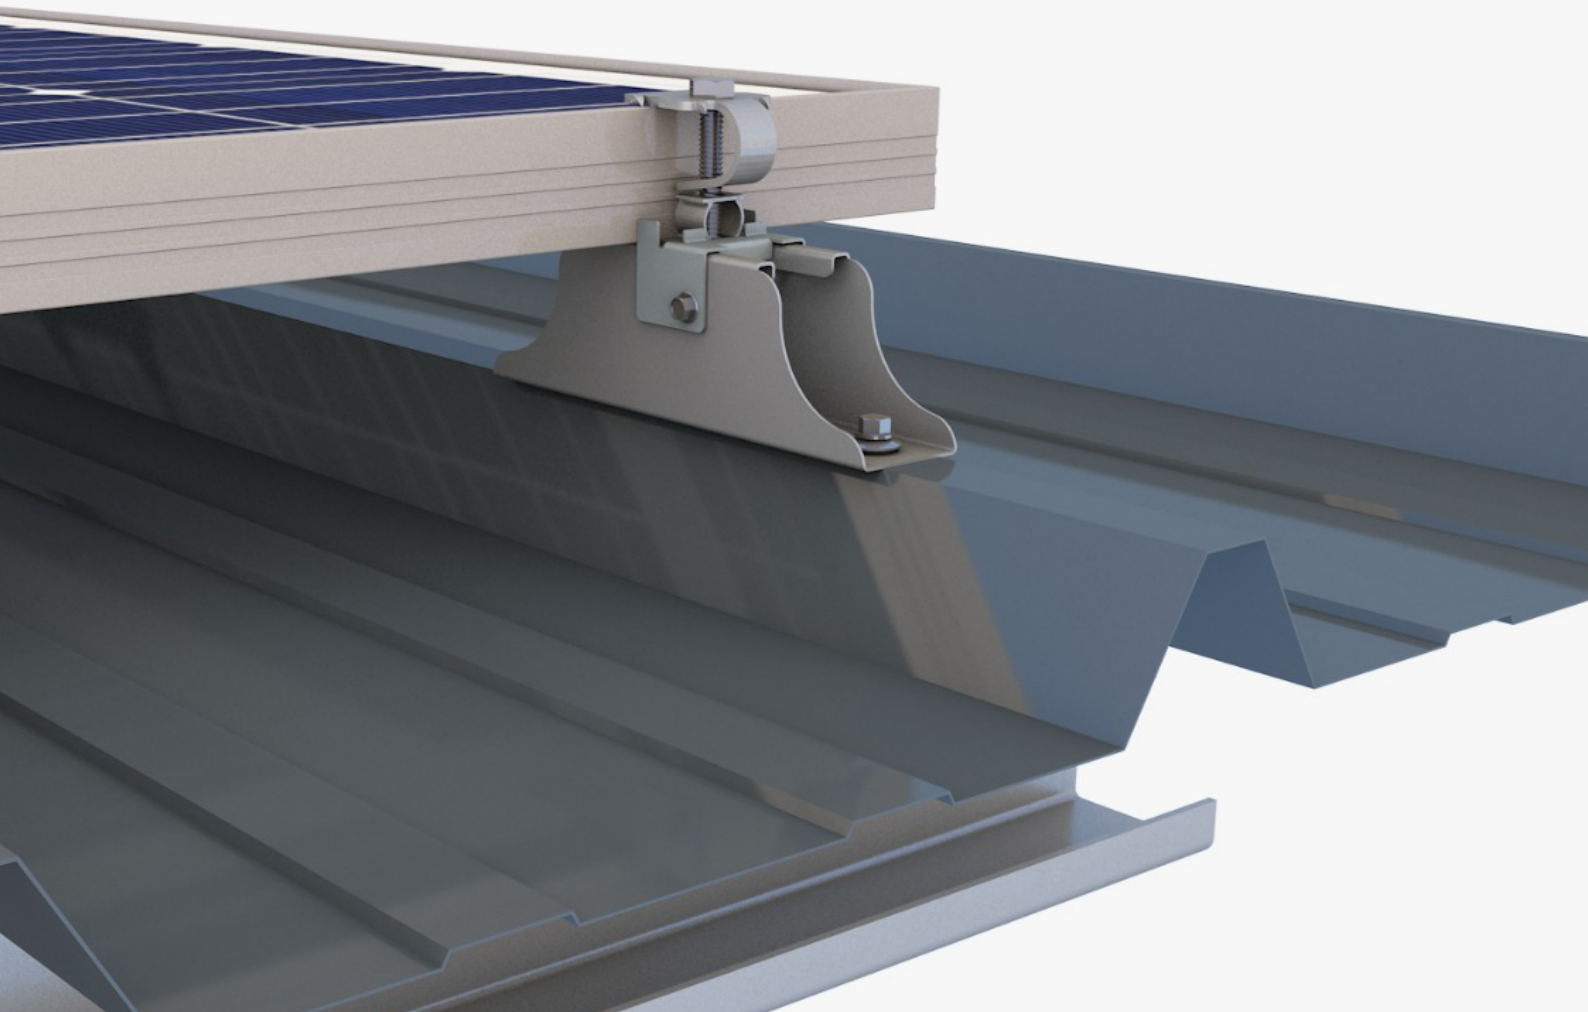

 182 Route de Marolles, 41330, Fossé, France

 info@adiwatt.com



 +33 2 54 23 39 90

ISO 9001:2015
BUREAU VERITAS
Certification



Product benefits


- **Optimised installation** : System designed for simplified assembly in less time.
- **Installation assistance** : System equipped with a pre-positioner for even faster installation.
- **Compact and ergonomic design** : Easy handling for installation by a single person.
- **100% watertight** : Seal under short rail and fixings.
- **Autonomous dimensioning** : Online calculator available for your PRIMA projects.
- **Smart packaging** : Optimised packaging, simplified logistics on construction sites.
- **Maximum adaptability** : Compatible with different types of modules and roof inclinations.

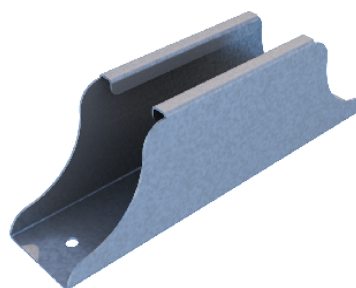

Technical characteristics

Application area	Steel tray from 0.63 mm thick, compliant with DTU 40.35
Roof tilt	2.5° to 30°
Weather resistance	Wind region 1 and 2* - Snow region A1* and A2*
Altitude	900 m maxi
Purlin spacing	Up to 2m*
Module features and guidance	Maximum dimensions : length : 2000 mm; width : 1134 mm Framed - Landscape format
Fixation	Stainless steel self-drilling screw
Ventilation under modules	Up to 9.6 cm
Matériau	Steel with Magnélis®
Grounding	VERITAS test report
Certification	ETN

** to be validated with the online*

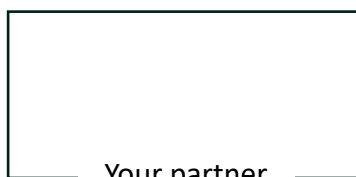

Your partner



Modules under ETN



Online calculator

Our sales team is at your disposal for the study of your projects on
www.adiwatt.com

